


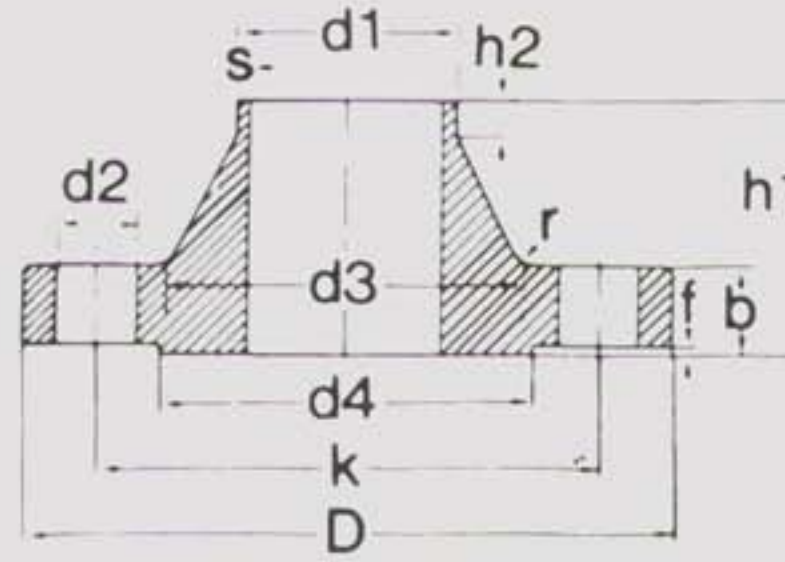

Paslanmaz Çelik Kaynak Boyunlu Flanşlar

DIN 2634/2635 normunda C NP 25/40 formu

DN	B. ÖLÇÜ	FLANŞ ÖLÇÜLERİ										VİDALAMA			TEOR. AĞIRLIK
		D	b	h1	d3	s	r	h2	d4	f	k	nr	diam	d2	
* 10	17,20	90	16	35	28	1,80	4	6	40	2	60	4	M12	14	0,66
* 15	21,30	95	16	38	32	2,00	4	6	45	2	65	4	M12	14	0,75
* 20	26,90	105	18	40	40	2,30	4	6	58	2	75	4	M12	14	1,06
* 25	33,70	115	18	40	46	2,60	4	6	68	2	85	4	M12	14	1,29
* 32	42,40	140	18	42	56	2,60	6	6	78	2	100	4	M16	18	1,88
* 40	48,30	150	18	45	64	2,60	6	7	88	3	110	4	M16	18	2,33
* 50	60,30	165	20	48	75	2,90	6	8	102	3	125	4	M16	18	2,82
* 65	76,10	185	22	52	90	2,90	6	10	122	3	145	4	M16	18	3,74
* 80	88,90	200	24	58	105	3,20	8	12	138	3	160	8	M16	18	4,75
* 100	114,30	235	24	65	134	3,60	8	12	162	3	190	8	M20	22	6,52
* 125	139,70	270	26	68	162	4,00	8	12	188	3	220	8	M24	26	9,07
* 150	168,30	300	28	75	192	4,50	10	12	218	3	250	8	M24	26	11,80
* 200	219,10	360	30	80	244	6,30	10	16	278	3	310	8	M24	26	17,00
	219,10	375	34	88	244	6,30	10	16	285	3	320	12	M27	30	21,50
* 250	273,00	425	32	88	298	7,10	12	18	335	3	370	12	M27	30	24,40
	273,00	450	38	105	306	7,10	12	18	345	3	385	12	M30	33	34,90

* = DIN 2634 (NP 25, up to NB 150 equal to DIN 2635 NP 40)